



● SOT-25

■ PIN CONFIGURATION




SOT-25 (TOP VIEW)


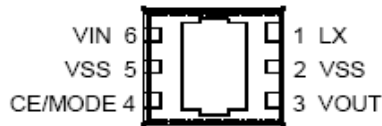


USP-6B (BOTTOM VIEW)

* Please short the VSS pin (pin no. 2 and 5) before use.
 Connection of the heat dissipation pad to any pin on the circuit is not recommended. If the pad must be connected due to a problem of heat dissipation or mounting intensity, connect to the VSS pin (pin no. 5).

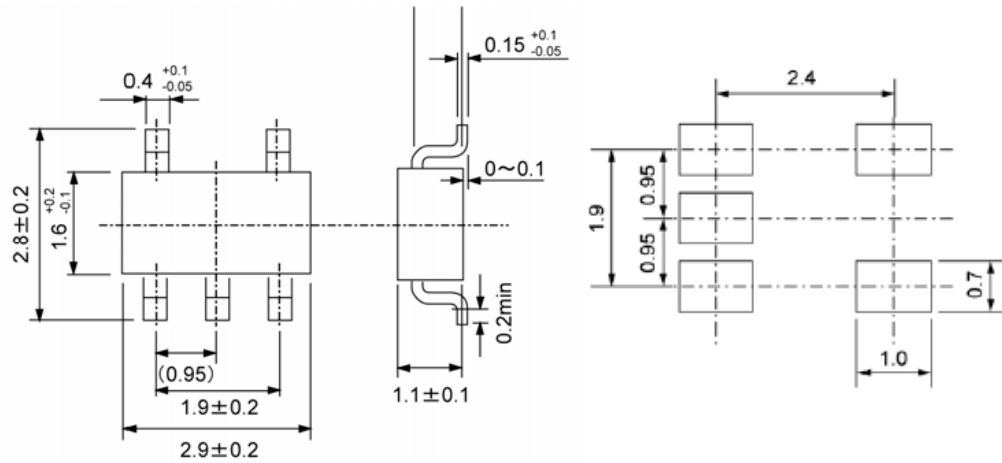


● USP-6B

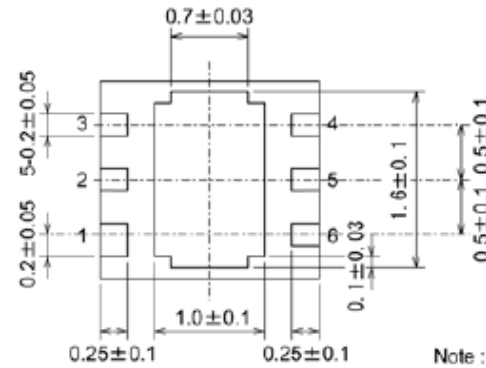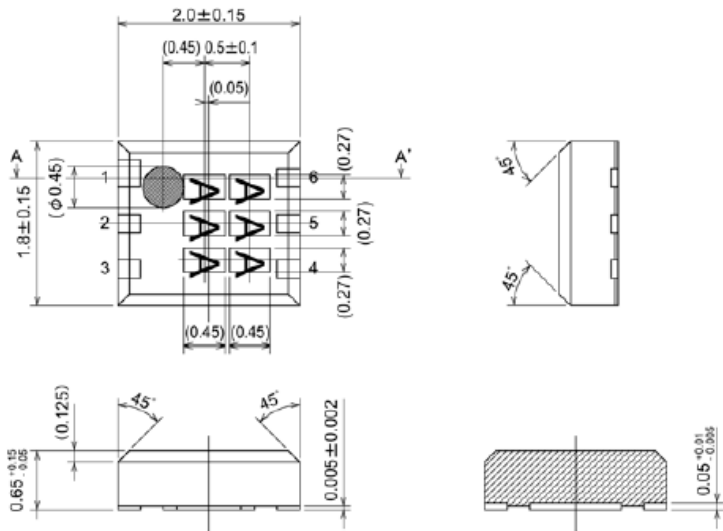

Note : Pin 1 is larger than the other pins.

● USB-6B

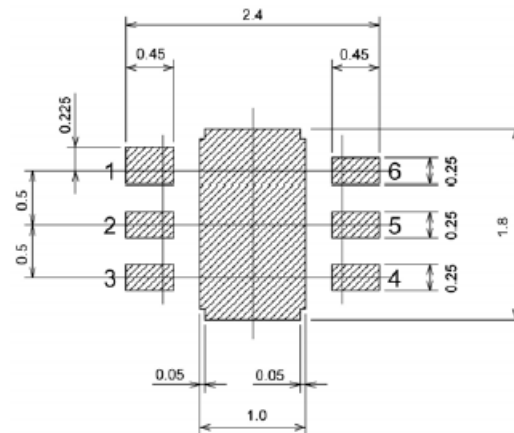

Note: Recommended metal design

